


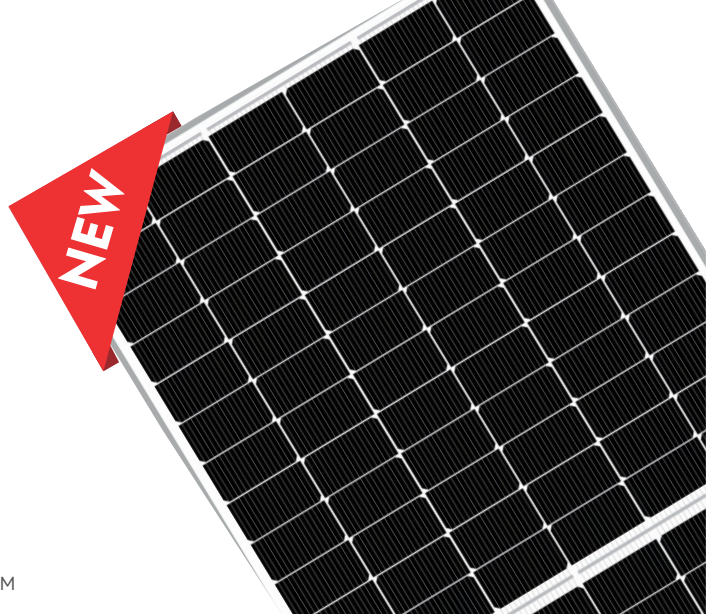

RT8I-M-DG

144 Cells

Mono 182*95mm, 16/18 BB

605-630W


Power Output

23.30%


The Highest Efficiency

0~+5W

Tolerance

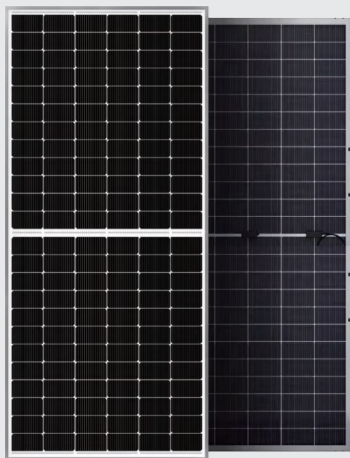

0.5% Annual Degradation over 30 years

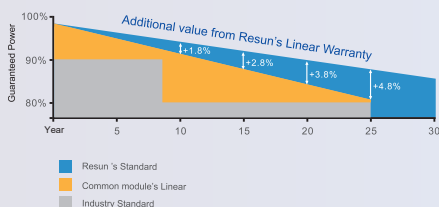

15 Year Product Warranty

30 Year Linear Power Warranty

WWW.RESTARSOLAR.COM

RT8I-M-DG 605-630W

RT8I-M-DG series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 2.0+2.0mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).





Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716



GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

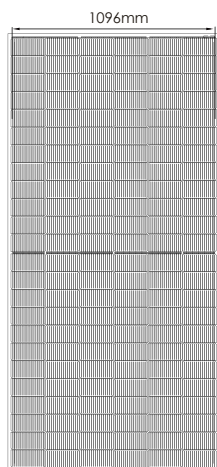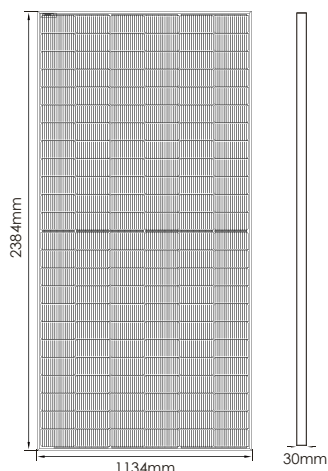

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	605	610	615	620	625	630
Open Circuit Voltage-Voc(V)	52.20	52.35	52.50	52.65	52.80	52.95
Short Circuit Current-Isc(A)	14.65	14.71	14.77	14.83	14.89	14.95
Maximum Power Voltage-Vmp(V)	44.40	44.56	44.70	44.84	45.00	45.14
Maximum Power Current-Imp(A)	13.63	13.69	13.76	13.83	13.89	13.96
Module Efficiency	22.38%	22.56%	22.75%	22.93%	23.12%	23.30%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	455	459	463	467	471	475
Open Circuit Voltage-Voc (V)	48.91	49.05	49.19	49.33	49.47	49.61
Short Circuit Current-Isc(A)	11.84	11.89	11.93	11.98	12.03	12.08
Maximum Power Voltage-Vmp(V)	41.65	41.80	41.93	42.06	42.21	42.34
Maximum Power Current-Imp(A)	10.93	10.98	11.04	11.10	11.16	11.22

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

INTEGRATED PWER @ STC (REFERENCE TO 10%)

Rated Power in Watts-Pmax(Wp)	665	671	677	682	688	693
Open Circuit Voltage-Voc(V)	52.20	52.35	52.50	52.65	52.80	52.95
Short Circuit Current-Isc(A)	15.88	15.95	16.03	16.09	16.16	16.22
Maximum Power Voltage-Vmp(V)	44.40	44.56	44.70	44.84	45.00	45.14
Maximum Power Current-Imp(A)	14.98	15.06	15.15	15.21	15.29	15.35
Module Efficiency(%)	24.60%	24.82%	25.04%	25.23%	25.45%	25.63%
BNPI/Isc(BSI)	18.17	18.24	18.31	18.39	18.4F	18.54

MECHANICAL DATA

Solar cells	Mono-crystalline 182*95.8mm, 16/18 Bus bars
Cell configuration	144cells(6*22)
Module dimensions	2384*1134*30mm
Weight	32.9kg
Front Cover	2.0+2.0mm Tempered Glass
J-BOX	IP68
Cable	4mm²(IEC)/12AWG(UL),300mm+300mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	36/37pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40~+70°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

	40HQ
Number of modules per container	720/740pcs
Package	36/37pcs/pallet
Package Number	20pallets
Package Weight	1229/1262kg/pallet
Package Dimension	2394*1130/1135*1270mm/pallet