

RT8H-M-DG

132 Cells

Mono N-Type/Topcon MBB

510-535W


Power output

22.53%


The Highest Efficiency

0~+5W

Tolerance

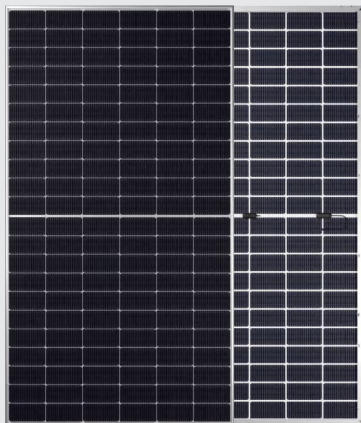


0.5% Annual Degradation over 30 years

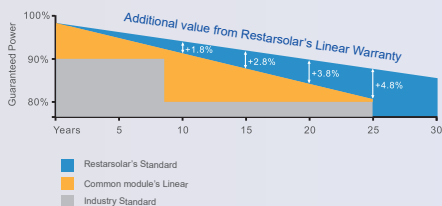

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty

30 Year Linear Power Warranty

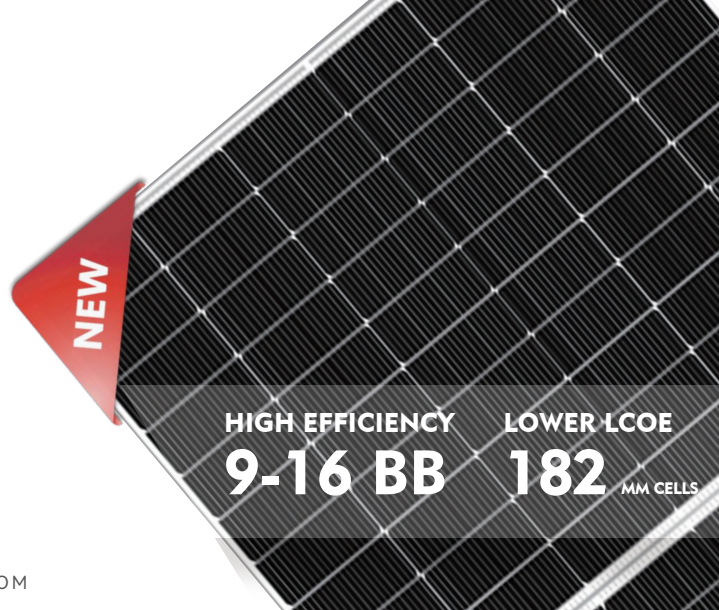

WWW.RESTARSOLAR.COM

RT8H-M-DG TOPCON

RT8H-M-DG HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 2.0+2.0mm tempered glass, the module has stronger performance under low light circumstances.




High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716



Dimension of PV Modules Unit: mm

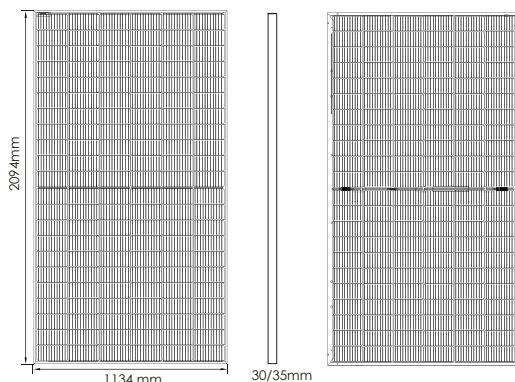

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	510	515	520	525	530	535
Open Circuit Voltage-Voc(V)	45.85	45.98	46.11	46.24	46.37	46.50
Short Circuit Current-Isc(A)	14.07	14.14	14.21	14.28	14.35	14.42
Maximum Power Voltage-Vmp(V)	38.71	38.89	39.07	39.24	39.41	39.58
Maximum Power Current-Imp(A)	13.17	13.24	13.31	13.38	13.45	13.52
Module Efficiency	21.48%	21.69%	21.90%	22.11%	22.32%	22.53%


STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)


Maximum Power-Pmax(Wp)	386	390	396	400	404	408
Open Circuit Voltage-Voc (V)	42.99	43.13	43.26	43.39	43.53	43.65
Short Circuit Current-Isc(A)	11.41	11.48	11.55	11.62	11.69	11.76
Maximum Power Voltage-Vmp(V)	36.11	36.20	36.37	36.54	36.71	36.88
Maximum Power Current-Imp(A)	10.68	10.77	10.89	10.95	11.01	11.07

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

I-V CURVES OF PV MODULE(500 W)

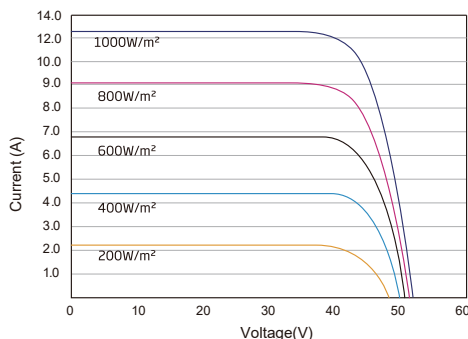

P-V CURVES OF PV MODULE(500W)

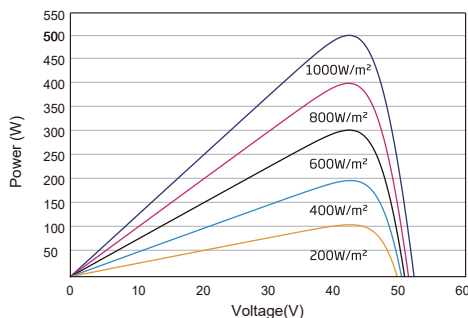

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power(pmax)	536	541	546	551	557	562
	Module Efficiency STC	22.6%	22.8%	23.0%	23.2%	23.4%	23.7%
10%	Maximum Power(pmax)	587	592	598	604	610	615
	Module Efficiency STC	24.7%	24.9%	25.2%	25.4%	25.7%	25.9%
15%	Maximum Power(pmax)	638	644	650	656	663	669
	Module Efficiency STC	26.8%	27.1%	27.4%	27.6%	27.9%	28.2%

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm, 9/10/16 Bus bars
Cell configuration	132cells(6*22)
Module dimensions	2094*1134*30mm/35mm
Weight	28.9kg/29.4kg
Front Cover	2.0+2.0mm Tempered Glass
J-BOX	IP68
Cable	4mm ² (IEC)/12AWG(UL), 300mm+300mm(or customized)
Connectors	MC4 or MC4 Comparable
Standard Packaging	36/31pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION

Number of modules per container	792/682 pcs/40HQ
Package	36/31 pcs/pallet
Package Number	22 pallets