

WWW.RESTARSOLAR.COM

RTM210-230M

33 Cells 18BB

Mono N-type/Topcon

210-230W

Power output

22.51%

The Highest Efficiency

0 ~ +5W

Tolerance



RTM210-230M N-TYPE/TOPCON

RTM210-230M N-TYPE/TOPCON series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High module conversion efficiency (up to 22.51%), through superior manufacturing technology



Guaranteed +3% power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust




Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

0.5% Annual Degradation over 30 years

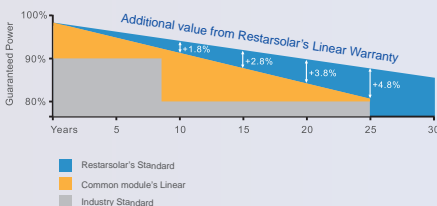

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty



30 Year Linear Power Warranty

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



Dimension of PV Modules Unit: mm

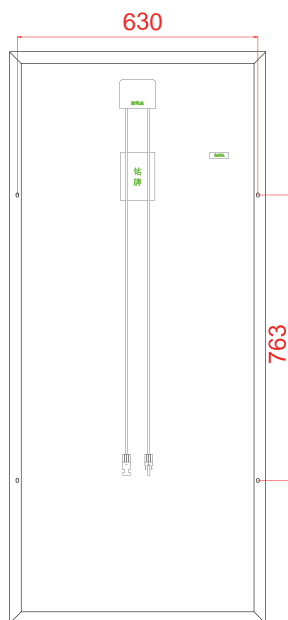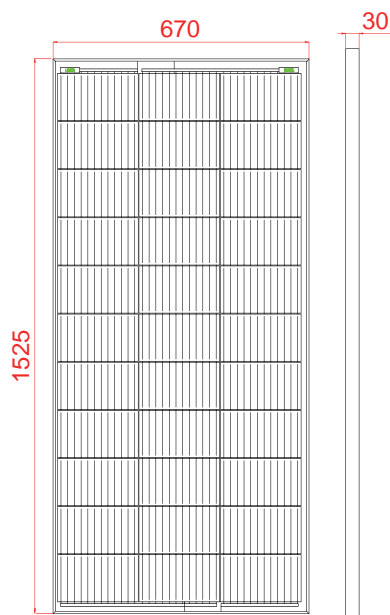

ELECTRICAL DATA(STC)

	210	220	230
Rated Power in Watts-Pmax(Wp)	210	220	230
Open Circuit Voltage-Voc(V)	22.85	23.15	23.45
Short Circuit Current-Isc(A)	11.79	12.14	12.47
Maximum Power Voltage-Vmp(V)	19.01	19.15	19.30
Maximum Power Current-Imp(A)	11.05	11.49	11.92
Module Efficiency	20.55%	21.53%	22.51%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

	156.71	164.14	171.62
Maximum Power-Pmax (Wp)	156.71	164.14	171.62
Open Circuit Voltage-Voc (V)	21.41	21.69	21.97
Short Circuit Current-Isc (A)	9.53	9.81	10.08
Maximum Power Voltage-Vmp(V)	17.70	17.84	17.97
Maximum Power Current-Imp(A)	8.85	9.20	9.55

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline N-type/Topcon 210*132mm,18 Bus bars
Cell configuration	33cells(3*11)
Module dimensions	1525*670*30mm
Weight	10.7kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP67 or IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Compatible
Standard Packaging	2pcs/carton

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C ±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.35%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)
Max Series Fuse Rating	15A
Limiting Reverse Current	15A

PACKAGING CONFIGURATION

2pcs/carton
750cartons/40HQ=1500pcs