



RTM240M

64 Cells

Mono, 4*16 parallel, 182*91mm

240W

Power output

20.24%

The Highest Efficiency

0 ~ +5W

Tolerance

WWW.RESTARSOLAR.COM

RTM240M

RTM240M series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.




High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).



0.5% Annual Degradation over 30 years

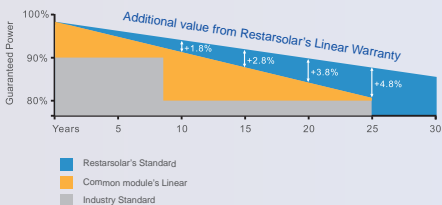

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty


25 Year Linear Power Warranty

Full range of products and certification systems


ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716




Dimension of PV Modules Unit: mm

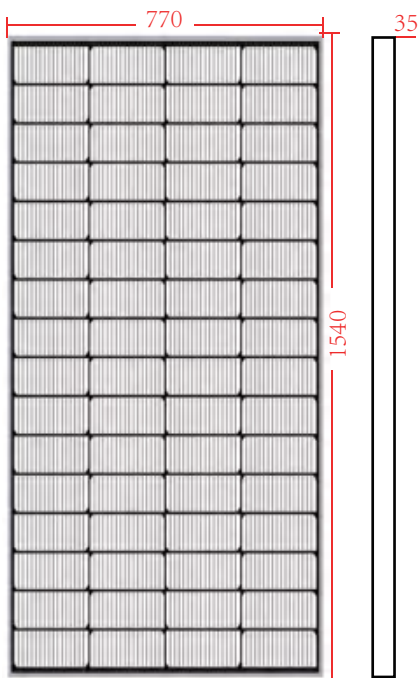

I-V CURVES OF PV MODULE

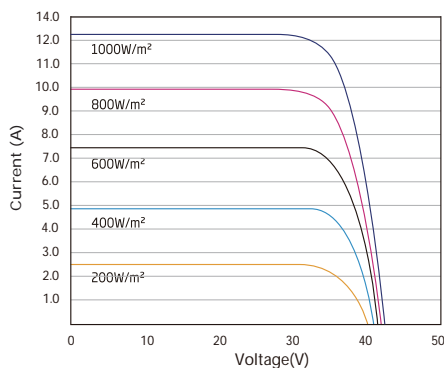

P-V CURVES OF PV MODULE

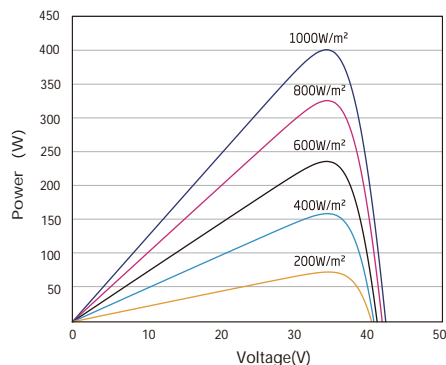

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	240
Open Circuit Voltage-Voc(V)	44.10
Short Circuit Current-Isc(A)	7.04
Maximum Power Voltage-Vmp(V)	36.10
Maximum Power Current-Imp(A)	6.65
Module Efficiency	20.24%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	179.09
Open Circuit Voltage-Voc (V)	41.32
Short Circuit Current-Isc(A)	5.69
Maximum Power Voltage-Vmp(V)	33.62
Maximum Power Current-Imp(A)	5.33

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm
Cell configuration	64 cells(4*16)
Module dimensions	1540*770*35mm
Weight	13.0kg
Front Cover	3.2mm Tempered Glass
Frame Materia	IP68
J-BOX	4mm ² (IEC)/12AWG(UL), 300mm+300mm, or customized
Cable	MC4 or MC4 Comparable

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
E-mail: sales@restarsolar.com
Web: www.restarsolar.com

MADE IN CHINA