

# RT7K-M-FB

**120 Cells**

Mono Half-Cell 9 BB

**355-380W**

Power output

**20.90%**

The Highest Efficiency

**0 ~ +5W**

Tolerance

WWW.RESTARSOLAR.COM

## RT7K-M-FB FULL BLACK

RT7K-M FULL BLACK series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect. The full black design makes the module appearance outstanding and ideal for building installations.



### High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



### Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



### Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



### High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



### Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.




### High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).



## 0.5% Annual Degradation over 30 years

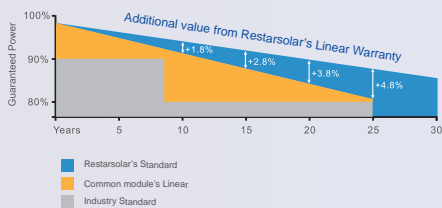

### LINEAR PERFORMANCE WARRANTY



**15 Year Product Warranty**

**30 Year Linear Power Warranty**


ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716




Dimension of PV Modules Unit: mm

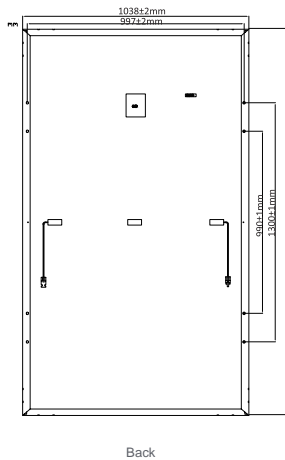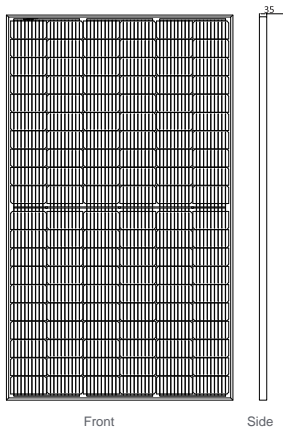

Current-Voltage Curve (RT7K-370M)

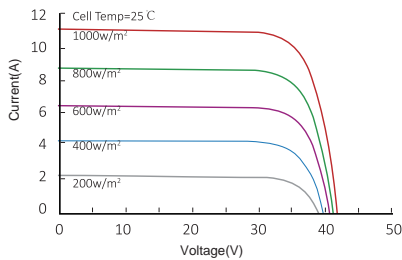

Power-Voltage Curve (RT7K-370M)

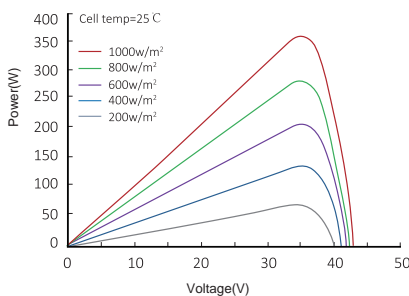

## ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	355	360	365	370	375	380
Open Circuit Voltage-Voc(V)	40.30	40.50	40.70	40.90	41.10	41.30
Short Circuit Current-Isc(A)	11.31	11.39	11.46	11.53	11.60	11.69
Maximum Power Voltage-Vmp(V)	33.90	34.10	34.20	34.40	34.60	34.80
Maximum Power Current-Imp(A)	10.48	10.56	10.67	10.76	10.84	10.92
Module Efficiency	19.50%	19.80%	20.00%	20.30%	20.60%	20.90%

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

## ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	263.0	266.7	270.4	274.1	277.8	281.5
Open Circuit Voltage-Voc (V)	37.60	37.80	38.00	38.20	38.40	38.50
Short Circuit Current-Isc(A)	9.07	9.15	9.22	9.29	9.35	9.42
Maximum Power Voltage-Vmp(V)	31.20	31.40	31.60	31.80	32.00	32.10
Maximum Power Current-Imp(A)	8.43	8.49	8.56	8.63	8.69	8.76

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## MECHANICAL DATA

Solar cells	Mono-crystalline 166*83mm,9 Bus bars
Cell configuration	120cells(6*20)
Module dimensions	1755*1038*35mm
Weight	19kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP67 or IP68
Cable	4mm <sup>2</sup> (IEC)/12AWG(UL),300mm+300mm(or customized )
Connectors	MC4 or MC4 Comparable
Standard Packaging	31pcs/pallet

## TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

## PACKAGING CONFIGURATION

Number of modules per container	858 pcs/40HQ
Package	31 pcs/pallet, 2 pcs/carton
Package Number	26 pallets + 26 cartons

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China  
Email: info@restarsolar.com  
Web: www.restarsolar.com

MADE IN CHINA