

# RT9H-M

**132 Cells**

N-type Topcon Mono 18 BB

**700-720W**

Power output

**23.18%**

The Highest Efficiency

**0 ~ +5W**

Tolerance

WWW.RESTARSOLAR.COM

## RT9H-M(TOPCON) Black Frame

**RT9H-M HALF-CELL** series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



### High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



### Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



### Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



### High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



### Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.




### High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).



## 0.5% Annual Degradation over 30 years

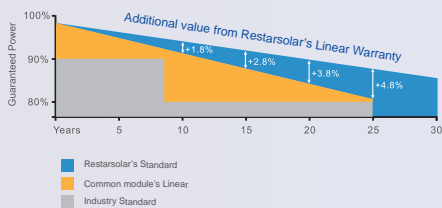

### LINEAR PERFORMANCE WARRANTY

**15 Year Product Warranty**


**30 Year Linear Power Warranty**

## Full range of products and certification systems


ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716




Dimension of PV Modules Unit: mm

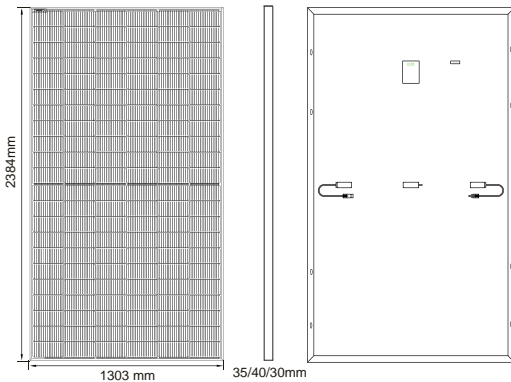

I-V CURVES OF PV MODULE(675 W)

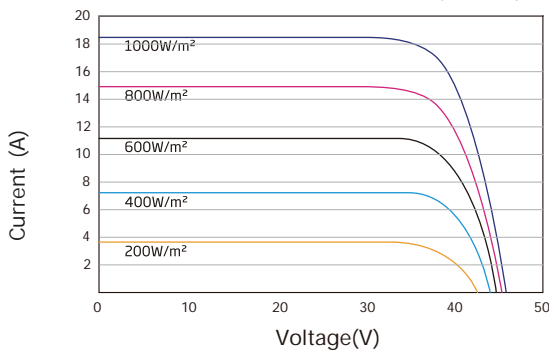

P-V CURVES OF PV MODULE(675W)

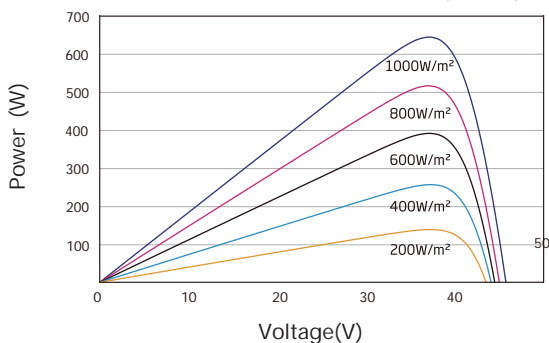

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District,  
Changzhou, Jiangsu Province, China  
Tel: +86 512-66292101  
E-mail: sales@restarsolar.com  
Web: www.restarsolar.com

## ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	700	705	710	715	720
Open Circuit Voltage-Voc(V)	46.60	48.80	49.00	49.20	49.40
Short Circuit Current-Isc(A)	18.32	18.36	18.40	18.44	18.49
Maximum Power Voltage-Vmp(V)	40.50	40.70	40.90	41.10	41.30
Maximum Power Current-Imp(A)	17.29	17.33	17.36	17.40	17.44
Module Efficiency(%)	22.53%	22.70%	22.86%	23.02%	23.18%

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

## ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	534	538	542	546	550
Open Circuit Voltage-Voc (V)	45.93	46.12	46.31	46.49	46.68
Short Circuit Current-Isc(A)	14.79	14.83	14.87	14.90	14.94
Maximum Power Voltage-Vmp(V)	38.07	38.26	38.45	38.63	38.82
Maximum Power Current-Imp(A)	14.02	14.06	14.10	14.13	14.17

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## MECHANICAL DATA

Solar Cells	Mono-crystalline 210*105mm,18/Busbars
Cell Configuration	132cells(6*22)
Module Dimensions	2384*1303*30mm/35mm/40mm
Weight	32.3kg/33.6kg/34.2Kg
Front Cover	3.2mm Tempered Glass
J-Box	IP68
Cable	4mm <sup>2</sup> (IEC)/12AWG(UL),350mm+450mm, or customized
Connectors	MC4 or MC4 Comparable
Standard Packaging	31/27pcs/pallet

## TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/C
Temperature Coefficient of Isc	0.045%/C
Temperature Coefficient of Pmax	-0.30%/C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

## PACKAGING CONFIGURATION

	40HQ
Number of modules per container	486/558/648pcs
Package	27/31/36pcs/pallet
Package Number	18pallets
Package Weight	944/1062/1180kg/pallet
Package Dimension	1325*1130*2520mm/pallet