


RT-HY SERIES 2.5KW-12V


HYBRID SOLAR INVERTER

Specifications


Model	RT-HY 2.5KW-12V
AC Input	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280 (APP/GEN mode); 170~264 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
AC Output	
Rated Capacity (kVA/kW)	2.5
Surge Power (kVA)	4
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency (Hz)	50 / 60
Switch Time (ms)	10 (APP/UPS mode) / 20 (GEN mode)
Wave Form	Pure Sine Wave
Overload Capacity (PV+Battery mode / PV mode)	long term@102%-125% load; 10s@125%-250% load
Max. Efficiency (Battery Mode)	91%@12VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	MPPT
Max. PV input Current (A) / Input Power (W)	18 / 3000
MPPT Range@Operating Voltage (VDC)	30 - 400
Max. PV Open Circuit Voltage (VDC)	450
Max. PV Charge Current (A)	100
Max. AC Charge Current (A)	100
Max. Charge Current (PV + AC) (A)	100
Battery	
Rated Voltage (VDC)	12
Max. Charging Current (A)	100
Max. Discharging Current (A)	150
Battery Type	Lithium / Lead-acid
Interface	
HMI	LCD
Interface	NA
Monitoring	WiFi (optional)
General Data	
Ingress Protection	IP21
Operating Temperature (°C)	-10 ~ 60
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature (°C)	-15 ~ 60
Net Weight (kg)	4.0
Gross Weight(kg)	4.5
Dimensions (H*W*D) (mm)	375x290x100
Max. Operating Altitude (m)	4000 (Derating above 1000)

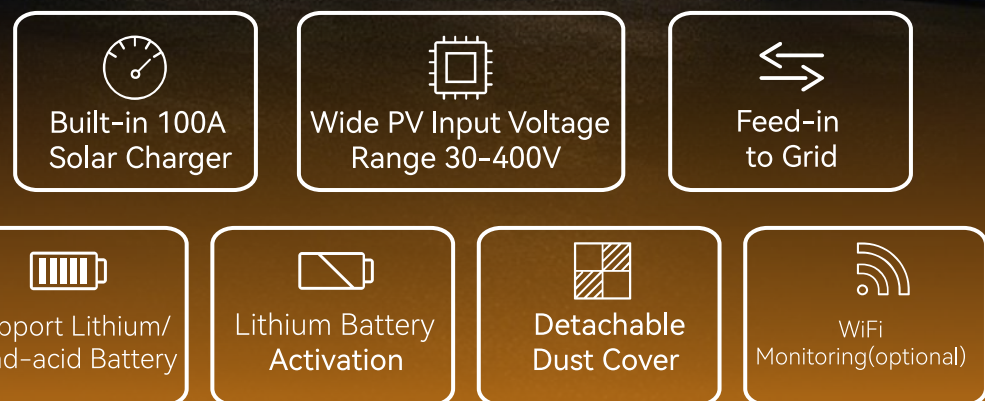


System Diagram

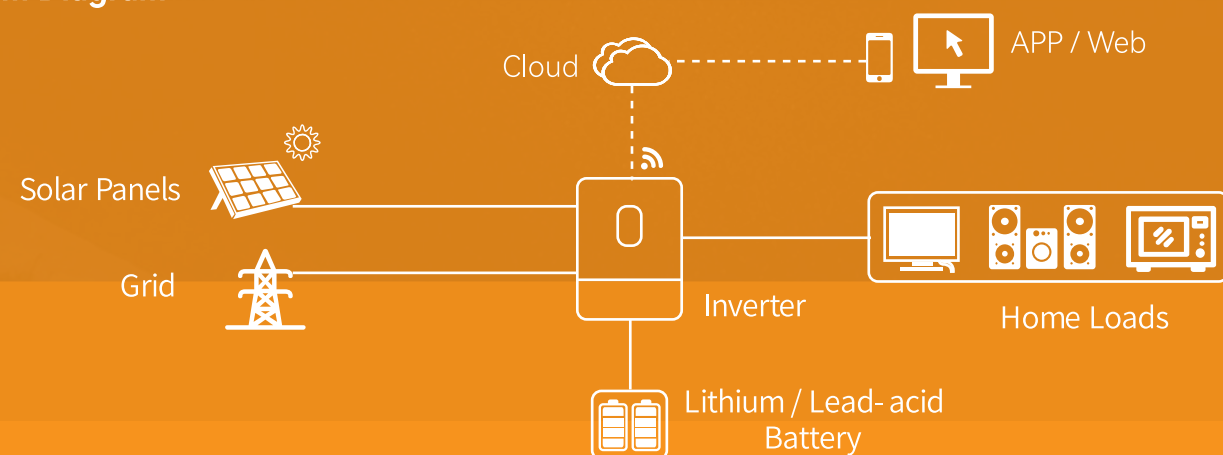

RT-HY SERIES 4.0KW-24V HYBRID SOLAR INVERTER

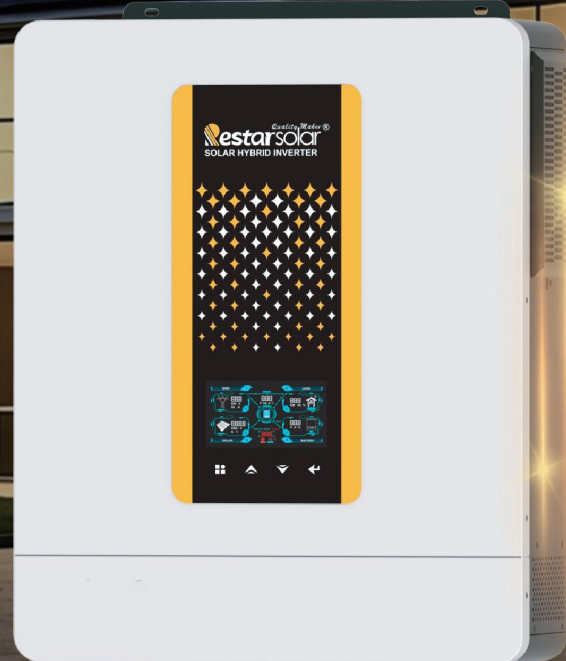


System Diagram

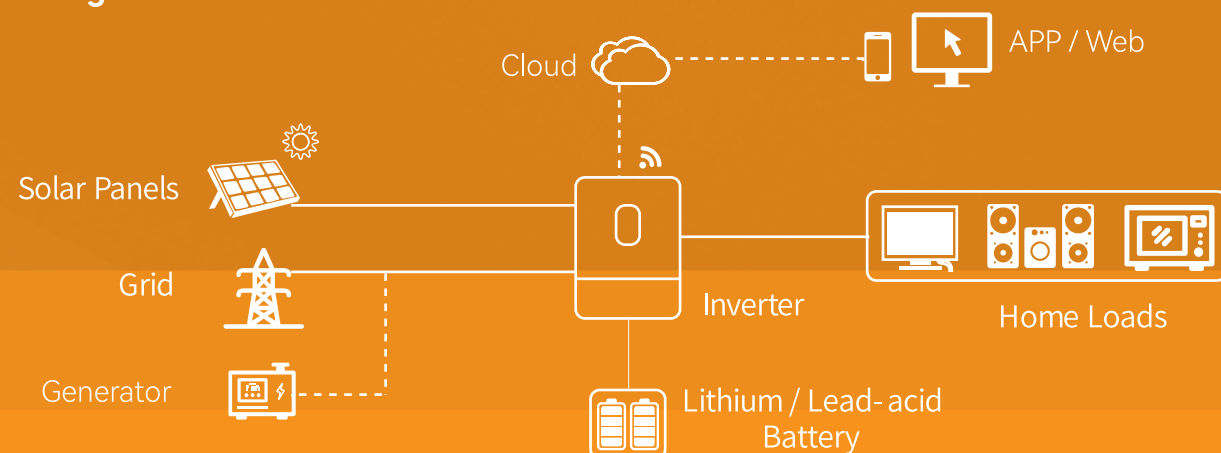


Specifications

Model	RT-HY 4.0KW-24V
AC Input	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
AC Output	
Rated Capacity (kW)	4.0
Surge Power (kVA)	7.2
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	60s@102%~110% load; 10s@110%~130% load; 3s@130%~150% load; 0.2s@>150% load
Max. Efficiency (Battery Mode)	92.7%@24VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	MPPT
Max PV input Current / Input Power	18A / 5000W
MPPT Range@Operating Voltage (VDC)	40~450
Max PV Open Circuit Voltage (VDC)	500
Max PV Charge Current (A)	100
Max AC Charge Current (A)	100
Max. Charge Current (PV + AC) (A)	100
Battery	
Rated Voltage (VDC)	24
Battery Type	Lithium and Lead-acid
Interface	
HMI	LCD
Interface	RS485 / RS232 / USB
Monitoring	WiFi (Optional)
General Data	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 60 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	5.7
Gross Weight(kg)	6.3
Dimensions (W*H*D)	435x285x98mm
Max. Operating Altitude	4000m (Derating above 1000m)

RT-HY SERIES 5.5KW-24V HYBRID SOLAR INVERTER

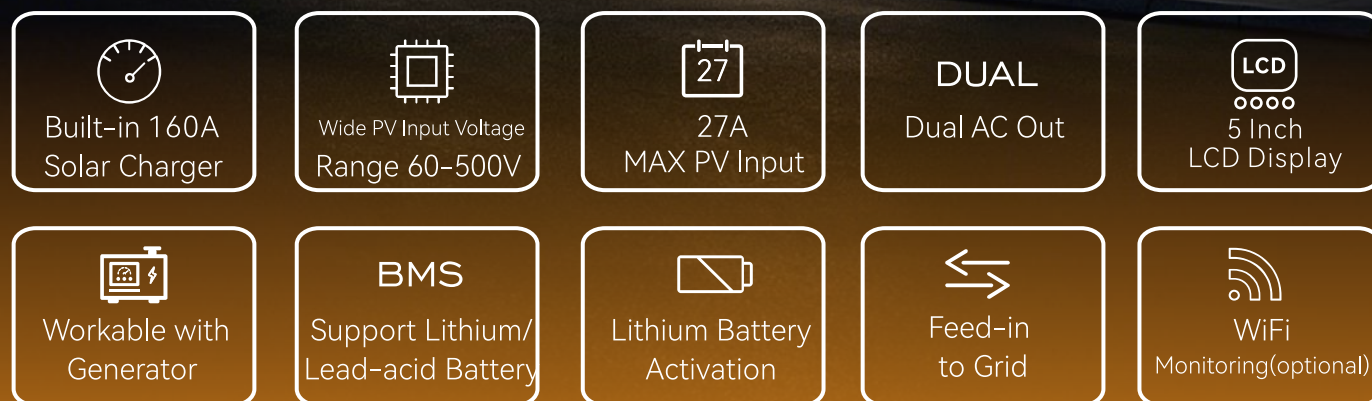

System Diagram

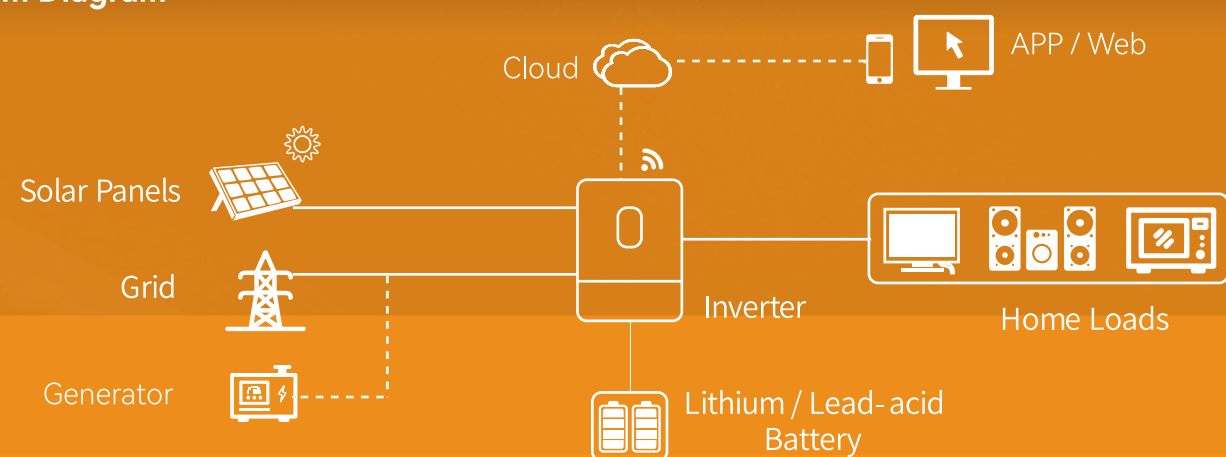

Specifications

Model	RT-HY 5.5KW-24V
AC Input	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
AC Output	
Rated Capacity (kW)	5.5
Surge Power (kVA)	10
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	1min@102%-120%load, 10s>120% load
Max. Efficiency (Battery Mode)	93.5%@24VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	MPPT
Max. PV Input Current / Input Power	27A / 9000W
MPPT Range@Operating Voltage (VDC)	60~450
Max. PV Open Circuit Voltage (VDC)	500
Max. PV Charge Current (A)	160
Max. AC Charge Current (A)	160
Max. Charge Current (PV + AC) (A)	160
Battery	
Rated Voltage (VDC)	24
Battery Type	Lithium and Lead-acid
Interface	
HMI	LCD
Interface	RS232 / RS485 / USB
Monitoring	WiFi (Optional)
General Data	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 60 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	7.8
Gross Weight(kg)	8.8
Dimensions (W*H*D)	410x336x115mm
Max. Operating Altitude	4000m (Derating above 1000m)

RT-HY SERIES 6.5KW-48V

HYBRID SOLAR INVERTER

Specifications

Model	RT-HY 6.5KW-48V
AC Input	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
AC Output	
Rated Capacity (kW)	6.5
Surge Power (kVA)	12
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	1min@102%~120%; 10S@ > 120%Load
Max. Efficiency (Battery Mode)	94%@48VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	MPPT
Max PV Input Current / Input Power	27A / 9000W
MPPT Range@Operating Voltage (VDC)	60~450
Max PV Open Circuit Voltage (VDC)	500
Max PV Charge Current (A)	120
Max AC Charge Current (A)	120
Max. Charge Current (PV + AC) (A)	120
Battery	
Rated Voltage (VDC)	48
Battery Type	Lithium and Lead-acid
Interface	
HMI	LCD
Interface	RS232 / RS485 / USB
Monitoring	WiFi (Optional)
General Data	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 60 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	8.0
Gross Weight(kg)	9.0
Dimensions (W*H*D)	410x336x115mm
Max. Operating Altitude	4000m (Derating above 1000m)



Built-in 120A Solar Charger



Wide PV Input Voltage Range 60-500V



27A MAX PV Input

DUAL

Dual AC Out



Workable with Generator

BMS

Support Lithium/Lead-acid Battery



Lithium Battery Activation




Feed-in to Grid



WiFi Monitoring(optional)

System Diagram

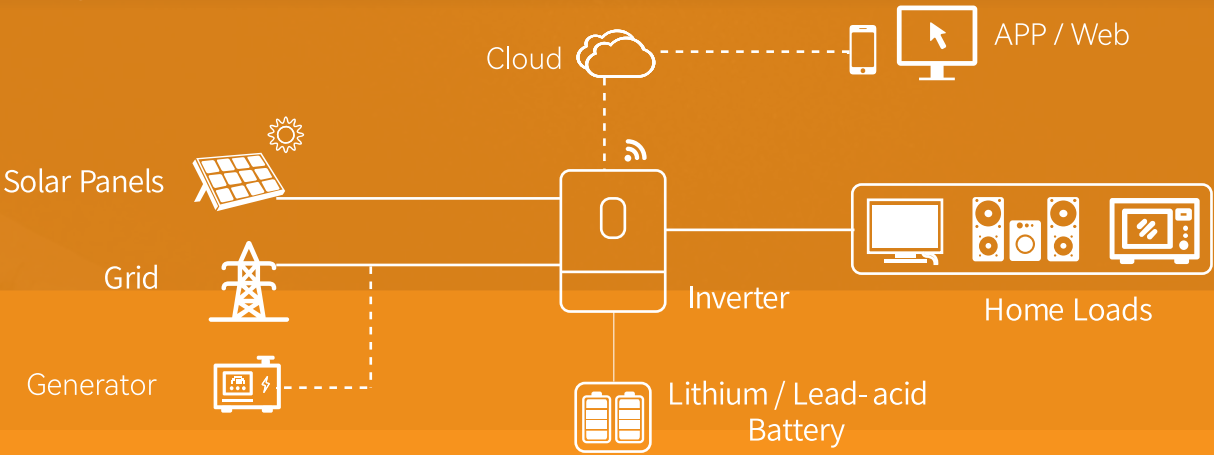


RT-HY SERIES 12KW-48V

HYBRID SOLAR INVERTER

Specifications

Model	RT-HY 12KW-48V
AC Input	
Rated Input Voltage (VAC)	220/230/240; L+N+PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50/60(Auto Adaptive)
AC Output	
Rated Capacity (kW)	12
Surge Power (kVA)	24
Voltage (VAC)	220/230/240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10(APP/UPS mode), 20(GEN mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	1min@102%~125%Load 10s@ > 125%Load
Max. Efficiency (Battery Mode)	94%@48VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	Dual MPPTs
Max. PV input Current / Input Power	Using One MPPT: 27A/9KW Using Two MPPTs: 22.5A/Per MPPT, 15kW/Total
MPPT Range@Operating Voltage (VDC)	60~450
Max. PV Open Circuit Voltage (VDC)	500
Max. PV Charge Current (A)	160
Max. AC Charge Current (A)	160
Max. Charge Current (PV + AC) (A)	160
Battery	
Rated Voltage (VDC)	48
Floating Charge Voltage (VDC)	54
Overcharge Protection (VDC)	61
Battery	Lithium and Lead-acid
Interface	
HMI	LCD
Interface	RS232 / RS485 / CAN
Monitoring	WiFi (Optional)
General Data	
Ingress Protection	IP21
Operating Temperature	-10 °C~60°C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15°C~60°C
Net Weight (kg)	14.7
Gross Weight(kg)	16.7
Dimensions (H*W*D)	525x435x138mm
Max. Operating Altitude	4000m(Derating above 1000m)

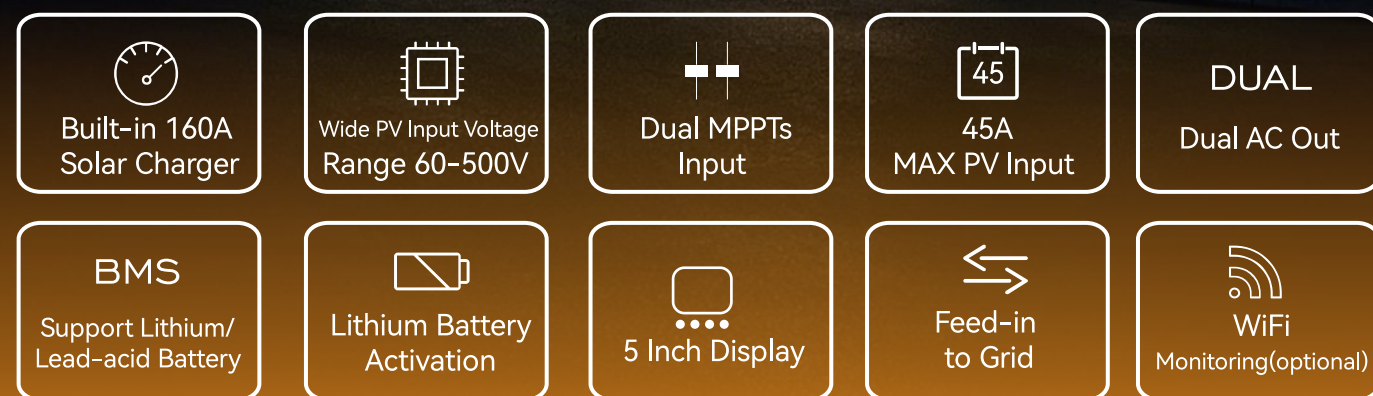

System Diagram

