
Quality Maker®
Restarsolar, power the life

GLOBALPROFESSIONAL PVPRODUCTS INTEGRATED SOLUTIONS SUPPLIER

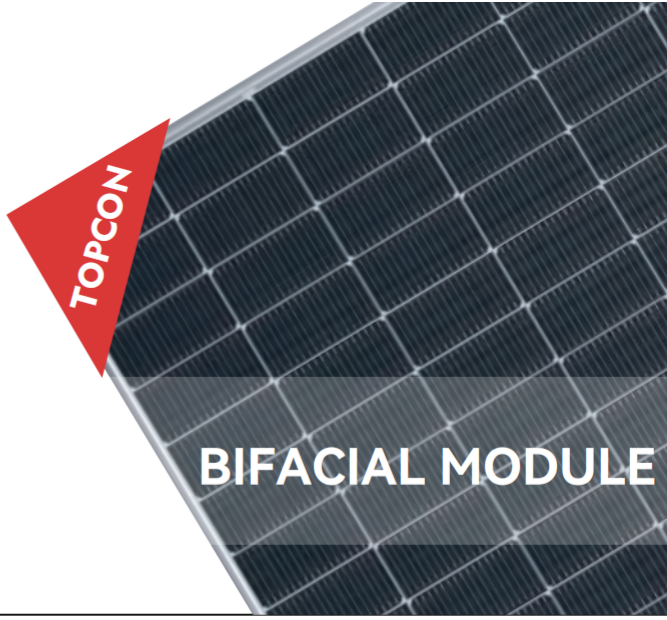

WWW.RESTARSOLAR.COM


RT8L-M-DG

156 Cells
Mono N-Type/Topcon 16 BB


595-640W
Power output

22.90%
The Highest Efficiency

0~+5W
Tolerance

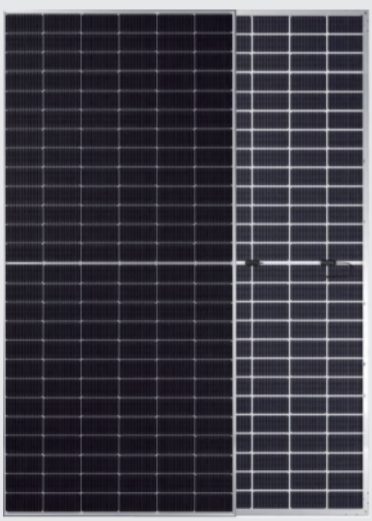

0.42% Annual Degradation over 30 years

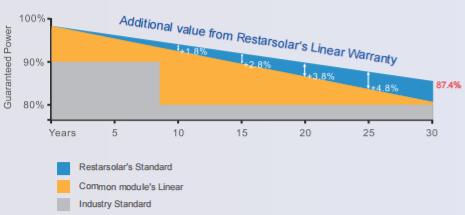

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty
30 Year Linear Power Warranty

RT8L-M-DG

RT8L-M-DG series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.

High Reliability
Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.

Anti-PID Resistance
Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.

Durability Against Extreme Conditions
Certified to resist high salt mist and ammonia conditions.

High Efficiency
Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.

Low-Light Performance
With high transmittance and anti-reflective 2.0+2.0mm tempered glass,the module has stronger performance under low light circumstances.

High Mechanical Strength
Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716

Quality Maker®
Restarsolar, power the life


RT8L-M-DG

TOPCON/N-TYPE

GLOBAL PROFESSIONAL PV PRODUCTS INTERGRATED SOLUTIONS SUPPLIER

WWW.RESTARSOLAR.COM

Dimension of PV Modules Unit: mm

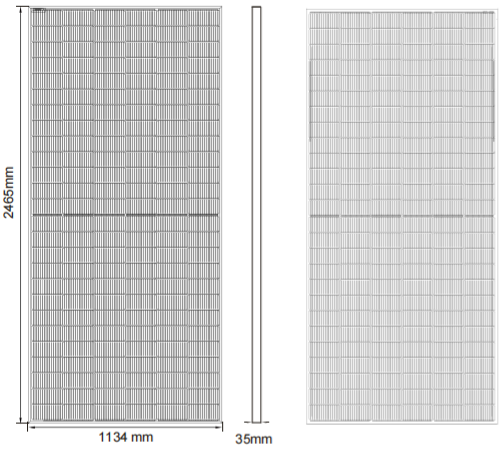

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	595	600	610	620	625	630	635	640
Open Circuit Voltage-Voc(V)	55.00	55.15	55.45	55.65	55.80	55.95	56.10	56.25
Short Circuit Current-Isc(A)	13.83	13.90	14.03	14.16	14.22	14.29	14.35	14.42
Maximum Power Voltage-Vmp(V)	45.70	45.85	46.15	46.45	46.61	46.75	46.90	47.04
Maximum Power Current-Imp(A)	13.02	13.09	113.22	13.35	13.41	13.48	13.54	13.61
Module Efficiency(%)	21.29%	21.46%	21.82%	22.18%	22.36%	22.54%	22.72%	22.90%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)


Maximum Power-Pmax(Wp)	450	454	462	470	474	478	482	486
Open Circuit Voltage-Voc (V)	51.54	51.68	51.96	52.14	52.28	52.43	52.57	52.71
Short Circuit Current-Isc(A)	11.17	11.23	11.34	11.44	11.49	11.55	11.59	11.65
Maximum Power Voltage-Vmp(V)	42.87	43.01	43.29	43.57	43.72	43.85	43.99	44.12
Maximum Power Current-Imp(A)	10.49	10.55	10.67	10.79	10.84	10.90	10.96	11.01

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.


INEGRATED PWER @ STC (REFRENCE TO 10%)

Rated Power in Watts-Pmax(Wp)	655	660	666	671	677	682	688	693
Open Circuit Voltage-Voc(V)	55.00	55.15	55.30	55.45	55.50	55.65	55.80	55.95
Short Circuit Current-Isc(A)	15.23	15.29	15.37	15.43	15.51	15.57	15.65	15.71
Maximum Power Voltage-Vmp(V)	45.70	45.85	46.01	46.15	46.30	46.45	46.61	46.75
Maximum Power Current-Imp(A)	14.34	14.40	14.48	14.54	14.62	14.68	14.76	14.82
Module Efficiency(%)	23.43%	23.61%	23.83%	24.00%	24.22%	24.40%	24.61%	24.79%
BNPI/Isc(BSI)	17.15	17.24	17.31	17.40	17.48	17.56	17.63	17.72

I-V CURVES OF PV MODULE

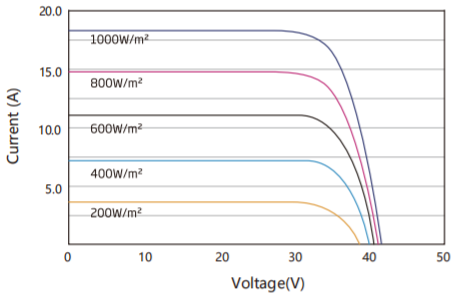

P-V CURVES OF PV MODULE

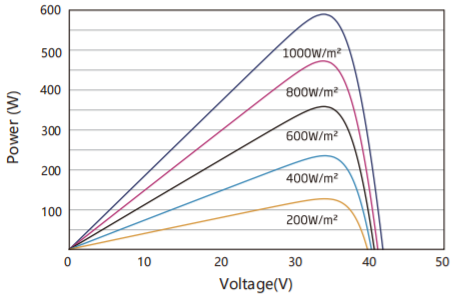

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm, 16 Bus bars
Cell configuration	156 cells (6*26)
Module dimensions	2465*1134*30mm
Weight	34.1kg
Front Cover	2.0+2.0mm Tempered Glass
Frame Materia	IP68
J-BOX	4mm²(IEC)/12AWG(UL), 300mm/300mm
Cable	MC4 or MC4 Comparable
Standard Packaging	36 pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C+2°C
Temperature Coefficient of Voc	- 0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	- 0.30%/°C
Operational Temperature	- 40~+85°C
Maximum System Voltage	1500V(EC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

	40HQ
Modules per container	576 pcs
Package	36 pcs/pallet
Package Number	16 pallets

Add: No: 30 Yongshun Road, Zhulin Town,
Jintan District,Changzhou, Jiangsu Province, China
E-mail: sales@restarsolar.com
Web: www.restarsolar.com