
Quality Maker®

Restarsolar, power the life

GLOBALPROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

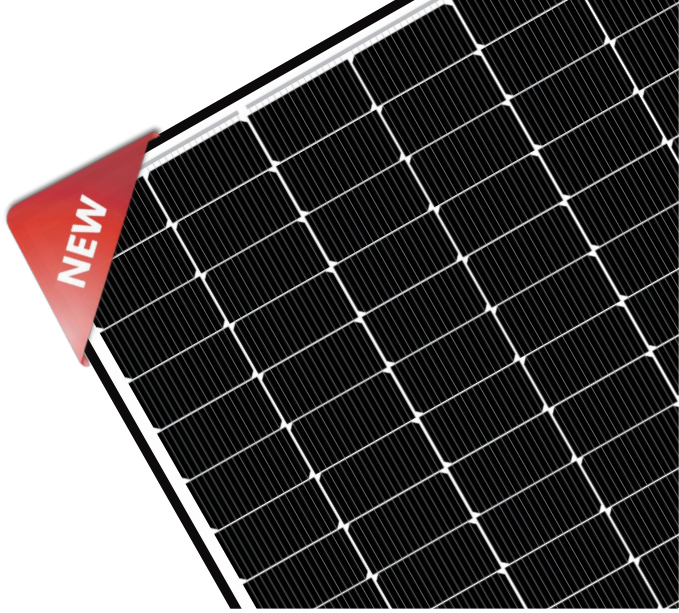


WWW.RESTARSOLAR.COM


# RT9H-M

**132 Cells**
N-type Topcon Mono 18 BB

**700-720W**
Power output

**23.18%**
The Highest Efficiency

**0~+5W**
Tolerance

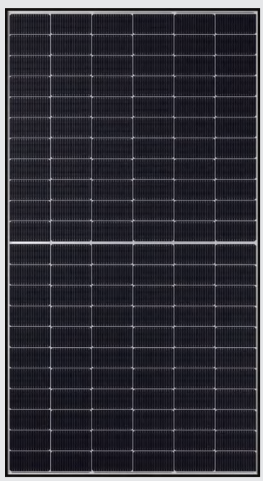

## RT9H-M(TOPCON) Black Frame

**RT9H-M HALF-CELL** series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spotcrisis caused by shadow effect.

### High Reliability
Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.

### Anti-PID Resistance
Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.


### Durability Against Extreme Conditions
Certified to resist high salt mist and ammonia conditions.

### High Efficiency
Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.

### Low-Light Performance
With high transmittance and anti-reflective 3.2mm tempered glass,the module has stronger performance under low light circumstances.

### High Mechanical Strength
Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

## 0.5% Annual Degradation over 30 years

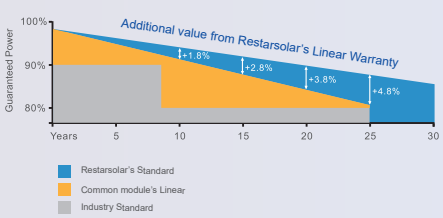


**LINEAR PERFORMANCE WARRANTY**

**15** Year Product Warranty

**30** Year Linear Power Warranty

## Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716


Quality Maker®
Restarsolar, power the life

# RT9H-M(TOPCON) Black Frame

WWW.RESTARSOLAR.COM

GLOBALPROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

**Dimension of PV Modules** Unit: mm

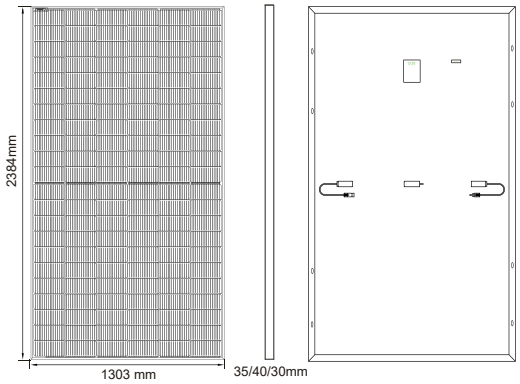


## ELECTRICAL DATA(STC)

| | | | | | |
|---|---|---|---|---|---|
| Rated Power in Watts-Pmax(Wp) | 700 | 705 | 710 | 715 | 720 |
| Open Circuit Voltage-Voc(V) | 46.60 | 48.80 | 49.00 | 49.20 | 49.40 |
| Short Circuit Current-Isc(A) | 18.32 | 18.36 | 18.40 | 18.44 | 18.49 |
| Maximum Power Voltage-Vmp(V) | 40.50 | 40.70 | 40.90 | 41.10 | 41.30 |
| Maximum Power Current-Imp(A) | 17.29 | 17.33 | 17.36 | 17.40 | 17.44 |
| Module Efficiency(%) | 22.53% | 22.70% | 22.86% | 23.02% | 23.18% |


STC: Irradiance 1000 W/m², Cell Temperature 25°C,Air Mass AM1.5 according to EN 60904-3.

## ELECTRICAL DATA(NOCT)


| | | | | | |
|---|---|---|---|---|---|
| Maximum Power-Pmax(Wp) | 534 | 538 | 542 | 546 | 550 |
| Open Circuit Voltage-Voc (V) | 45.93 | 46.12 | 46.31 | 46.49 | 46.68 |
| Short Circuit Current-Isc(A) | 14.79 | 14.83 | 14.87 | 14.90 | 14.94 |
| Maximum Power Voltage-Vmp(V) | 38.07 | 38.26 | 38.45 | 38.63 | 38.82 |
| Maximum Power Current-Imp(A) | 14.02 | 14.06 | 14.10 | 14.13 | 14.17 |

NOCT: Irradiance at 800 W/m²,Ambient Temperature 20°C, Wind Speed 1m/s.

## I-V CURVES OF PV MODULE(675 W)

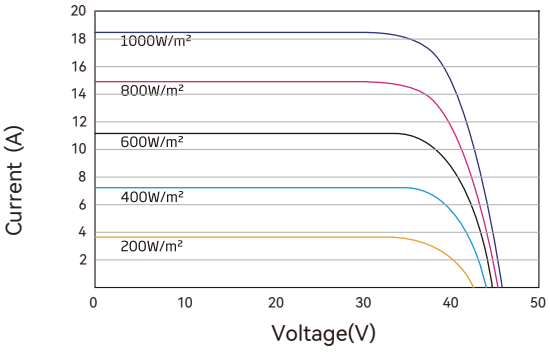


## P-V CURVES OF PV MODULE(675W)

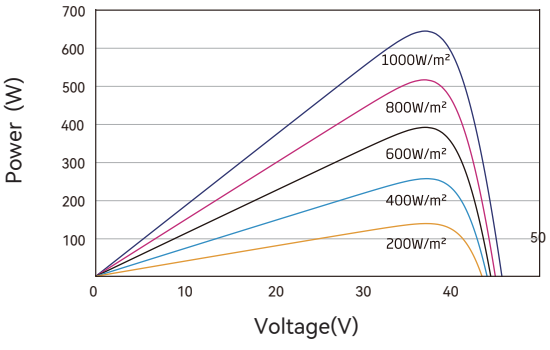


## MECHANICAL DATA

| | |
|---|---|
| Solar Cells | Mono-crystalline 210*105mm,18/Busbars |
| Cell Configuration | 132cells(6*22) |
| Module Dimensions | 2384*1303*30mm/35mm/40mm |
| Weight | 32.3kg/33.6kg/34.2Kg |
| Front Cover | 3.2mm Tempered Glass |
| J-Box | IP68 |
| Cable | 4mm²(IEC)/12AWG(UL),350mm+450mm, or customized |
| Connectors | MC4 or MC4 Comparable |
| Standard Packaging | 31/27pcs/pallet |

## TEMPERATURE & MAXIMUM RATINGS

| | |
|---|---|
| Nominal Operating Cell Temperature(NOCT) | 45°C±2°C |
| Temperature Coefficient of Voc | -0.25%/C |
| Temperature Coefficient of Isc | 0.045%/C |
| Temperature Coefficient of Pmax | -0.30%/C |
| Operational Temperature | -40~+85°C |
| Maximum System Voltage | 1500V(IEC)/1500V(UL) |
| Max Series Fuse Rating | 30A |
| Limiting Reverse Current | 30A |

## PACKAGING CONFIGURATION

| | 40HQ |
|---|---|
| Number of modules per container | 486/558/648pcs |
| Package | 27/31/36pcs/pallet |
| Package Number | 18pallets |
| Package Weight | 944/1062/1180kg/pallet |
| Package Dimension | 1325*1130*2520mm/pallet |


Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
Tel: +86 512-66292101
E-mail: sales@restarsolar.com
Web: www.restarsolar.com